
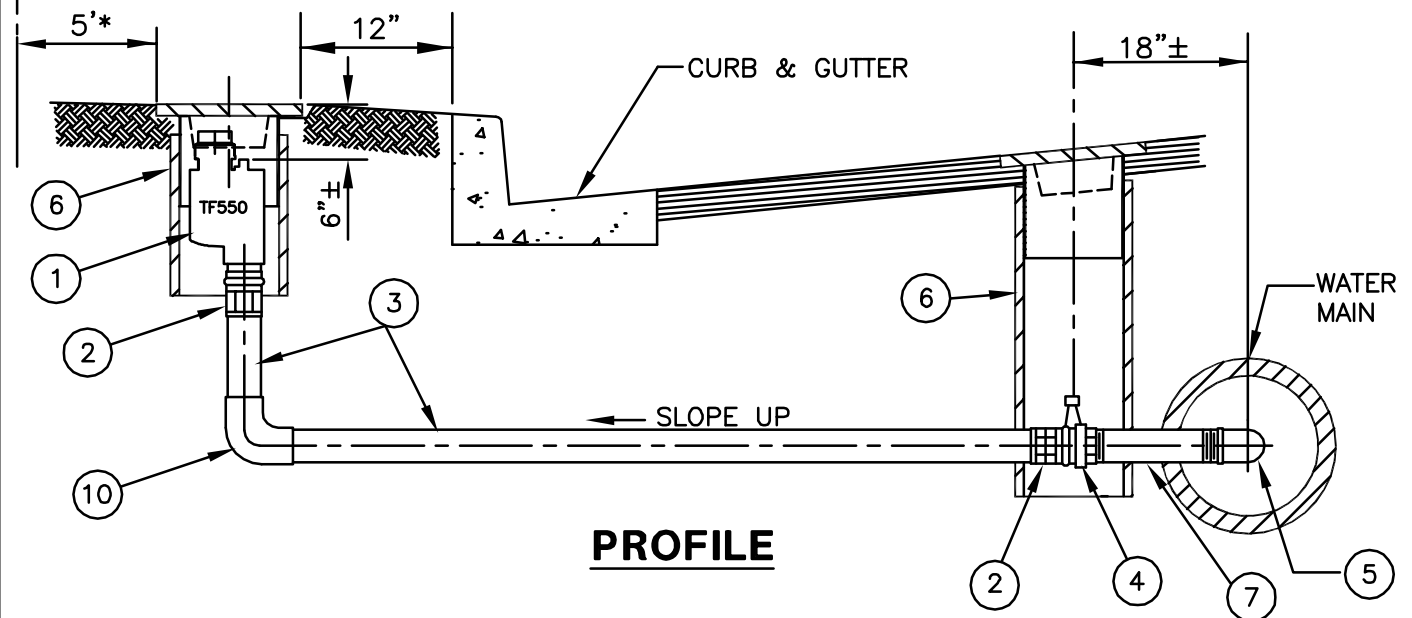


ITEM	DESCRIPTION
(1)	KUPFERLE TRUFLO MODEL TF550 BLOW-OFF HYDRANT W/2" FIP INLET
(2)	2" ADAPTOR - 2" MIP x SJ
(3)	2" COPPER TYPE K TUBING
(4)	2" FIP BALL VALVE - FORD B11-777 OR JONES J-1900
(5)	2" BRASS STREET ELBOW
(6)	VALVE BOX ASSEMBLY (SEE T712) MOD.
(7)	2" BRASS NIPPLE AS REQUIRED
(8)	CONC. THRUST BLOCK PER T713
(9)	PIPE SIZE C.I. M.J. CAP W/2" IP DRILLED & TAPPED HOLE
(10)	2" 90° ELBOW - COPPER TO COPPER SJxSJ

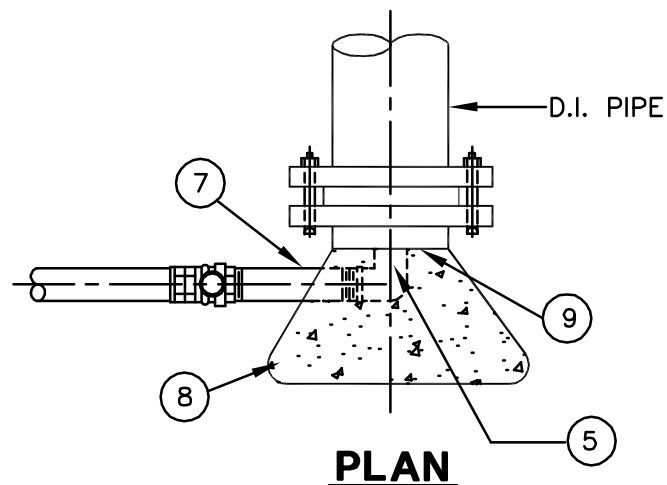

\* WHERE THERE IS NO CURB, THE BLOW-OFF BOX SHALL BE SET 5' CLEAR OF PROPERTY LINE.

ACCOMPANYING STD'S T700, T701, T712 AND T713

## CITY OF TORRANCE - ENGINEERING DEPARTMENT

DATE ISSUED

23 JUL 2002

## 2" BLOW-OFF ASSEMBLY

RICHARD W. BURTT  
ENGINEERING DIRECTOR  
R.C.E. NO. 32862

STANDARD NO.

**T707-2**

SHEET 1 OF 1

EM/T707-2